


## Smart valve solution for smooth and stable slewing function.

Slewing valve DLC is a double pilot controlled check valve that is developed for slewing and hydraulic motor functions in load sensing systems. The valve interacts with the control spool in the main control valve which results in very good control properties and facilitates a smooth and stable slewing function.

The slewing valve DLC has integrated shock and anticavitation functions.



## Dimensions:

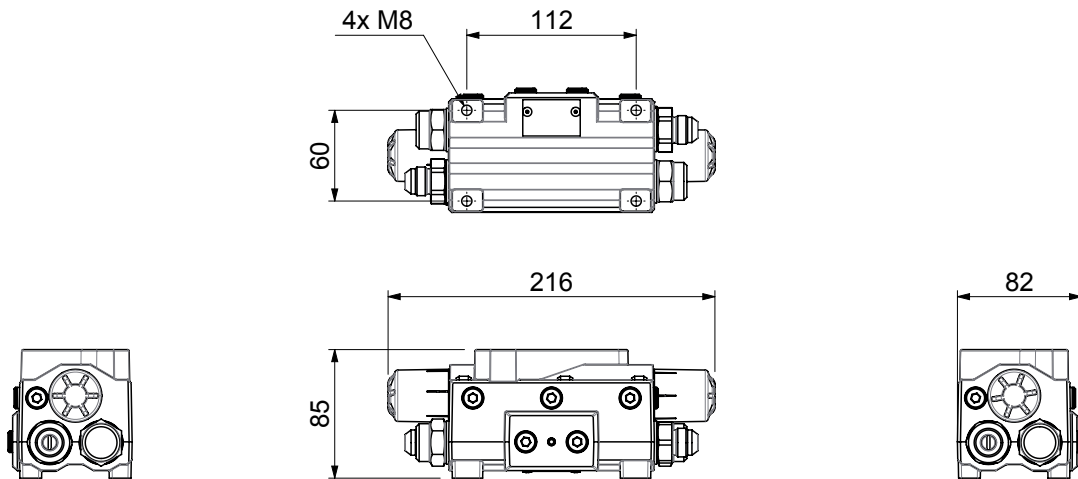

## Technical data:

- Valve function: Double pressure controlled check valve with integrated shock and anticavitation valves.
- Type: Slewing control valve
- Connections: G1/2", Valve ports G1/2" JIC 3/4", Cylinder ports G1/2" JIC 3/4"
- Flow total: Max. 75 l/min.
- Max. pump pressure: 45,0 MPa (450 bar)

**Olsbergs Hydraulics AB**  
Box 17  
SE-575 21 Eksjö  
Sweden  
Phone: +46 (0)381 150 75

**Olsbergs Electronics AB**  
Box 267  
SE-186 24 Vallentuna  
Sweden  
Phone: +46 (0)8 511 858 50